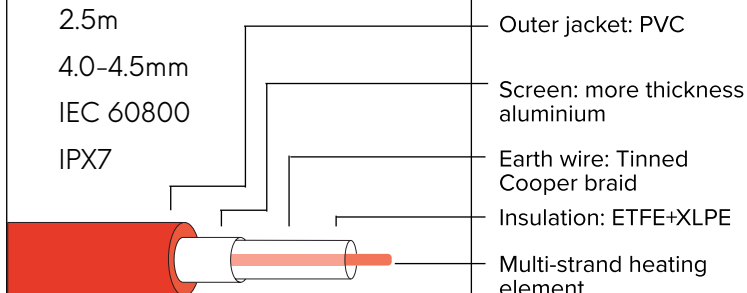


In-Slab Floor Heating Cable				
Model	Wattage	Resistance	Length	Length
IC300	300	176.33	10.00	1 - 2 m <sup>2</sup>
IC500	500	105.80	16.67	2 - 3.2 m <sup>2</sup>
IC750	750	70.53	25.00	3.5 - 4.5 m <sup>2</sup>
IC900	900	58.78	30.00	5 - 6 m <sup>2</sup>
IC1250	1250	42.32	41.67	6 - 8 m <sup>2</sup>
IC1600	1600	33.06	53.33	9 - 10.5 m <sup>2</sup>
IC1800	1800	29.39	60.00	11 - 12 m <sup>2</sup>
IC2000	2000	26.45	66.57	12 - 13.5 m <sup>2</sup>
IC2300	2300	23.00	76.67	14 - 15 m <sup>2</sup>
IC2750	2750	19.24	91.67	16 - 18 m <sup>2</sup>
IC2950	2950	17.93	98.33	19 - 20 m <sup>2</sup>
IC3550	3550	14.90	118.33	21 - 23.5 m <sup>2</sup>
IC4200	4200	12.60	140.00	24 - 28 m <sup>2</sup>
IC5600	5600	9.45	186.67	32 - 37 m <sup>2</sup>

### In-Slab Floor Heating Cable

<b>In-Slab Floor Heating Cable</b>	TXLP/1	
<b>Operating Voltage</b>	230-240V	
<b>Watts/Meter</b>	30W/m	
<b>Cable Diameter - In-slab</b>	6.0-6.5mm	
<b>Cold Lead Length</b>	2.5m	
<b>Cold Lead Diameter</b>	4.0-4.5mm	
<b>Standards</b>	IEC 60800	
<b>Ingress Protection Rating</b>	IPX7	
<b>Cable Construction</b>		
<b>Conductor</b>	Single	
<b>Primary Insulation</b>	XLPE	
<b>Primary Screen</b>	Tinned copper ground wire	
<b>Secondary Screen</b>	Aluminum foil shield	
<b>Cable Sheath</b>	Red PVC (105deg)	