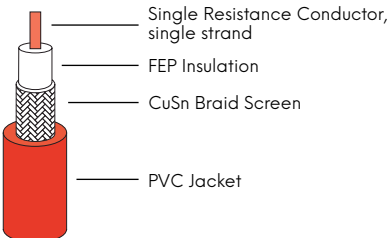


On-Slab Floor Heating Cable				
Model	Wattage	Resistance	Length	Coverage
FHS0200	200	264.50	13.33	1 - 1.5 m ²
FHS0300	300	176.33	20.00	1 - 2.2 m ²
FHS0400	400	132.25	26.67	2.2 - 3 m ²
FHS0500	500	105.80	33.33	3 - 4 m ²
FHS0650	650	81.38	43.33	4 - 5 m ²
FHS0800	800	66.13	53.33	5 - 6 m ²
FHS1000	1000	52.90	66.67	6 - 7.5 m ²
FHS1250	1250	42.32	83.33	7.5 - 9 m ²
FHS1500	1500	35.27	100.00	9 - 11 m ²
FHS1800	1800	29.39	120.00	11 - 13.5 m ²
FHS2000	2000	26.45	133.33	13.5 - 16 m ²
FHS2500	2500	21.16	166.67	16 - 20 m ²
FHS3000	3000	17.63	200.00	20 - 24 m ²

On-Slab Floor Heating Cable

On-Slab Floor Heating Cable	FHS Series
Operating Voltage	230-240V
Watts/Meter	15W/m
Cable Diameter - On-slab	2.5-2.8mm
Cold Lead Length	2.5m
Cold Lead Diameter	4.0-4.5mm
Standards	IEC 60800 / IEC 60529
Ingress Protection Rating	IPX7
Cable Construction	
Conductor	Single
Primary Insulation	Flouroplastic
Primary Screen	Tinned copper braiding
Cable Sheath	Red PVC (105deg)